
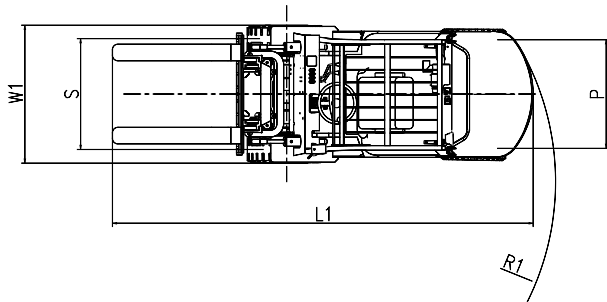


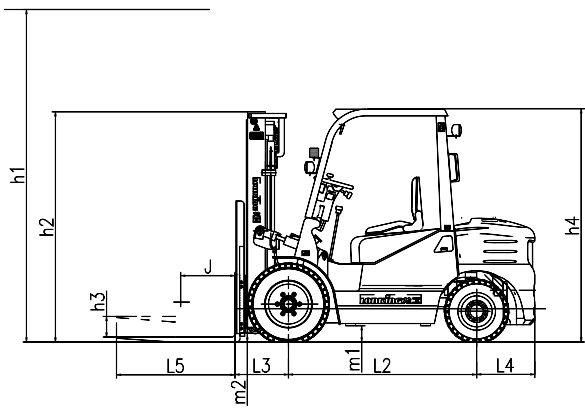

MODEL	LG80DT	LG100DT	LG160DT
Power type	Diesel	Diesel	Diesel
Rated capacity (Kg)	8000	10000	16000
J Load centre (mm)	600	600	600
h1 STD Max lifting height (mm)	3000	3000	3500
h3 Free lifting height (mm)	205	210	0
L5*W*T STD Fork size (mm)	1370*150*75	1520*175*85	1800*180*100
Mast tilt angle (deg)	9/12	6/12	6/12
L3 Front overhang (mm)	700	716	970
L4 Rear overhang (mm)	780	780	840
Overall dimension			
L1 Overall length(with fork) (mm)	5350	5816	7410
W1 Overall width(mm)	2230	2230	2752
h2 Mast lowered height (mm)	2675	2845	3675
h4 Overhead guard height (mm)	2565	2575	3445
R1 Min. turning radius (mm)	3730	4000	5300
Min. intersecting aisle(mm)	5700	5960	8200
Speed(load/unload)			
Max. traveling speed (km/h)	25/27	25/27	22/27
Max. lifting speed (mm/s)	310/350	310/350	300/350
Max. gradient (%)	20	20	20
Self weight (kg)	10700	12800	21500
S/P Tread(front/rear) (mm)	1534/1700	1600/1700	1895/2120
L2 Axle distance (mm)	2500	2800	3800
Min.ground clearance			
m2 Mast (mm)	225	240	330
m1 Frame (mm)	270	300	340
STD Engine	Yuchai YC6B125	Yuchai YC6B125	Yuchai YC6A175
Rated power	92kW	92kW	128kW

LG80DT/LG100DT/LG160DT **Internal Combustion Forklift**

Equipped with Yuchai Engine or Imported Isuzu Engine
 Advanced Ergonomical Design
 New Type Hydraulic Transmission
 Wide View Mast

LONKING
 Efficiency Rules the Future



	LG80DT	LG100DT	LG160DT
Rated Capacity (kg):	8000	10000	16000
Power Type:	Diesel	Diesel	Diesel